



SPEC® CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®2006 = 21.9

CELSIUS M460, Intel Core 2 Quad Q9450

SPECint_base2006 = 19.7

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

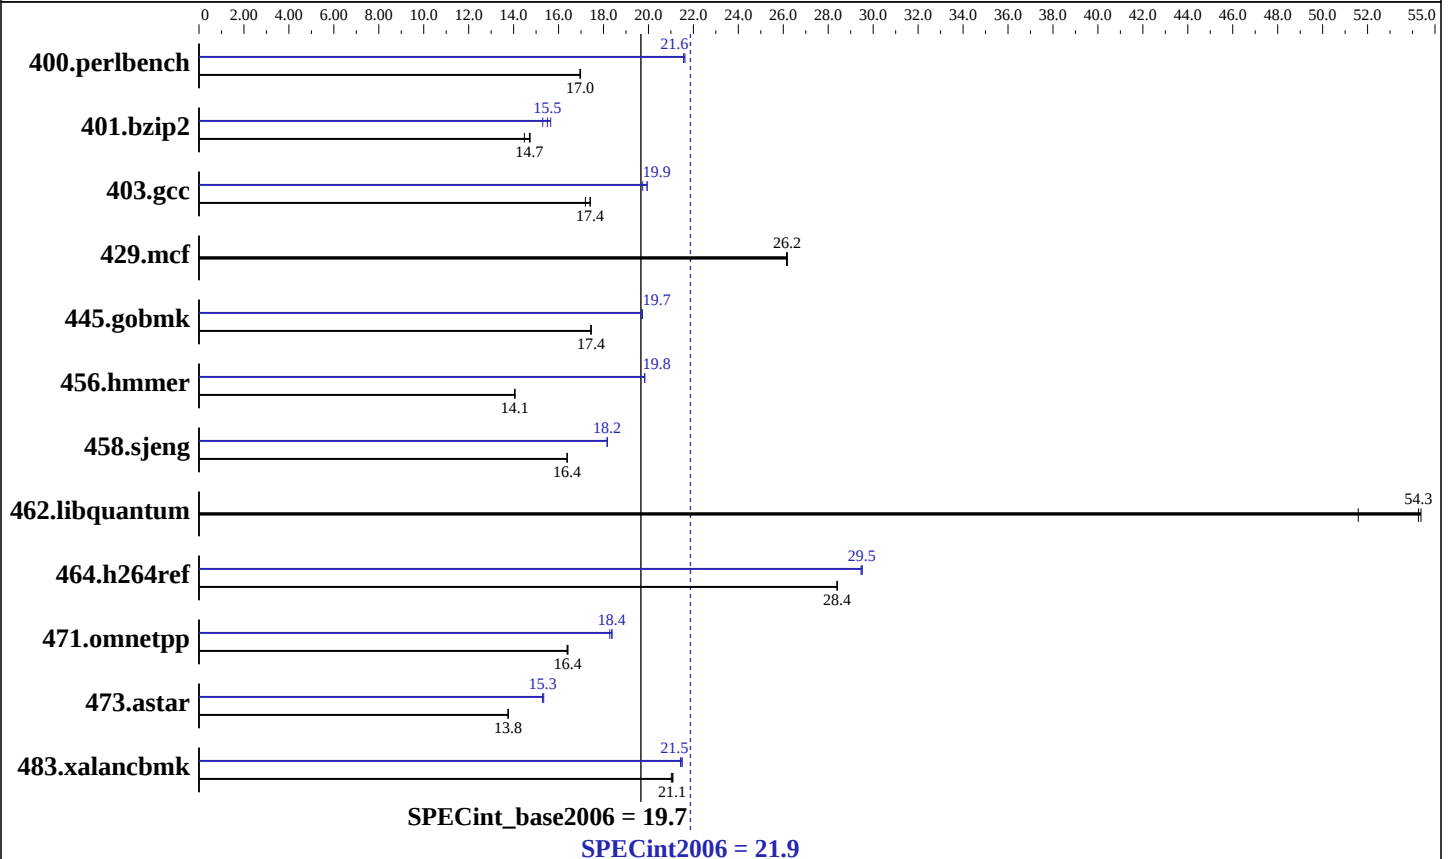

Hardware

CPU Name: Intel Core 2 Quad Q9450
CPU Characteristics: 2667
CPU MHz: Integrated
FPU: 4 cores, 1 chip, 4 cores/chip
CPU(s) enabled: 1 chip
CPU(s) orderable: 32 KB I + 32 KB D on chip per core
Primary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
Secondary Cache: None
L3 Cache: None
Other Cache: None
Memory: 4 GB (4x1 GB PC2-6400 CL6 SDRAM)
Disk Subsystem: 1 x 400 GB SATA 7200 RPM
Other Hardware: None

Software

Operating System: Windows Vista Ultimate, 64 bit Version
Compiler: Intel C++ Compiler for applications running on IA-32, Version 10.1, Build 20070913
Intel C++ Compiler for applications running on Intel 64, Version 10.1, Build 20070913
Microsoft Visual Studio 2005 with SP1 (for libraries)
Auto Parallel: Yes
File System: NTFS
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap Library 8.1



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 21.9

CELSIUS M460, Intel Core 2 Quad Q9450

SPECint_base2006 = 19.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	576	17.0	575	17.0	<u>576</u>	<u>17.0</u>	452	21.6	453	21.6	<u>453</u>	<u>21.6</u>
401.bzip2	667	14.5	<u>656</u>	<u>14.7</u>	655	14.7	631	15.3	617	15.7	<u>622</u>	<u>15.5</u>
403.gcc	<u>463</u>	<u>17.4</u>	462	17.4	468	17.2	408	19.7	404	19.9	<u>404</u>	<u>19.9</u>
429.mcf	349	26.1	<u>348</u>	<u>26.2</u>	348	26.2	349	26.1	<u>348</u>	<u>26.2</u>	348	26.2
445.gobmk	<u>601</u>	<u>17.4</u>	601	17.4	601	17.5	532	19.7	532	19.7	<u>532</u>	<u>19.7</u>
456.hmmer	664	14.1	<u>664</u>	<u>14.1</u>	664	14.1	<u>471</u>	<u>19.8</u>	471	19.8	470	19.8
458.sjeng	738	16.4	739	16.4	<u>738</u>	<u>16.4</u>	<u>666</u>	<u>18.2</u>	666	18.2	666	18.2
462.libquantum	<u>382</u>	<u>54.3</u>	402	51.6	381	54.4	<u>382</u>	<u>54.3</u>	402	51.6	381	54.4
464.h264ref	780	28.4	<u>779</u>	<u>28.4</u>	779	28.4	751	29.5	<u>750</u>	<u>29.5</u>	750	29.5
471.omnetpp	381	16.4	382	16.4	<u>381</u>	<u>16.4</u>	342	18.3	340	18.4	<u>340</u>	<u>18.4</u>
473.astar	<u>510</u>	<u>13.8</u>	510	13.8	510	13.8	459	15.3	<u>459</u>	<u>15.3</u>	458	15.3
483.xalancbmk	327	21.1	328	21.0	<u>328</u>	<u>21.1</u>	322	21.4	<u>322</u>	<u>21.5</u>	321	21.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS default settings have been used.

General Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com/>

Base Compiler Invocation

C benchmarks:
icl -Qvc8 -Qc99

C++ benchmarks:
icl -Qvc8



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 21.9

CELSIUS M460, Intel Core 2 Quad Q9450

SPECint_base2006 = 19.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
483.xalancbmk: -Qoption, cpp, --no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-fast -Qparallel -Qvec-guard-write -Qpar-runtime-control -F512000000
libguide40.lib

C++ benchmarks:
-fast -Qcxx-features -F512000000 libguide40.lib shlw32M.lib
-link -FORCE:MULTIPLE

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icl -Qvc8 -Qc99

401.bzip2: C:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Bin\\icl.exe
-IC:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Include
-link -LIBPATH:C:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Lib
-link -LIBPATH:"C:\\Program Files\\Microsoft Visual Studio 8\\vc\\lib"
-link -LIBPATH:"C:\\Program Files\\Microsoft Visual Studio 8\\vc\\lib\\amd64"

456.hmmer: C:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Bin\\icl.exe
-IC:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Include
-link -LIBPATH:C:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Lib
-link -LIBPATH:"C:\\Program Files\\Microsoft Visual Studio 8\\vc\\lib"
-link -LIBPATH:"C:\\Program Files\\Microsoft Visual Studio 8\\vc\\lib\\amd64"

C++ benchmarks:
icl -Qvc8



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 21.9

CELSIUS M460, Intel Core 2 Quad Q9450

SPECint_base2006 = 19.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Peak Portability Flags

401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_WIN32
456.hmmmer: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
483.xalancbmk: -Qoption, cpp, --no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qparallel
-Qpar-runtime-control -Qansi-alias -Qprefetch -F512000000
libguide40.lib shlw32M.lib -link -FORCE:MULTIPLE
401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch
-F512000000 libguide40.lib
403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F512000000
libguide40.lib
429.mcf: basepeak = yes
445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -O2 -Qipo -QxT
-Qprec-div- -Qansi-alias -F512000000
456.hmmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias -Qopt-multi-version-aggressive -F512000000
libguide40.lib
458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
-F512000000 libguide40.lib
462.libquantum: basepeak = yes
464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias -F512000000 libguide40.lib

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
-Qansi-alias -Qopt-ra-region-strategy=block -F512000000
libguide40.lib shlw32M.lib -link -FORCE:MULTIPLE
473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
-Qansi-alias -Qopt-ra-region-strategy=routine -F512000000
libguide40.lib shlw32M.lib -link -FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 21.9

CELSIUS M460, Intel Core 2 Quad Q9450

SPECint_base2006 = 19.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx-features
-Qansi-alias -F512000000 libguide40.lib shlw32M.lib
-link -FORCE:MULTIPLE

Peak Other Flags

Same as Base Other Flags

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20080124.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20080124.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Thu Apr 3 18:43:09 2008 by SPEC CPU2006 PS/PDF formatter v5614.