



SPEC® CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®_rate2006 = 66.6

CELSIUS M460, Intel Core 2 Quad Q9550

SPECint_rate_base2006 = 61.2

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

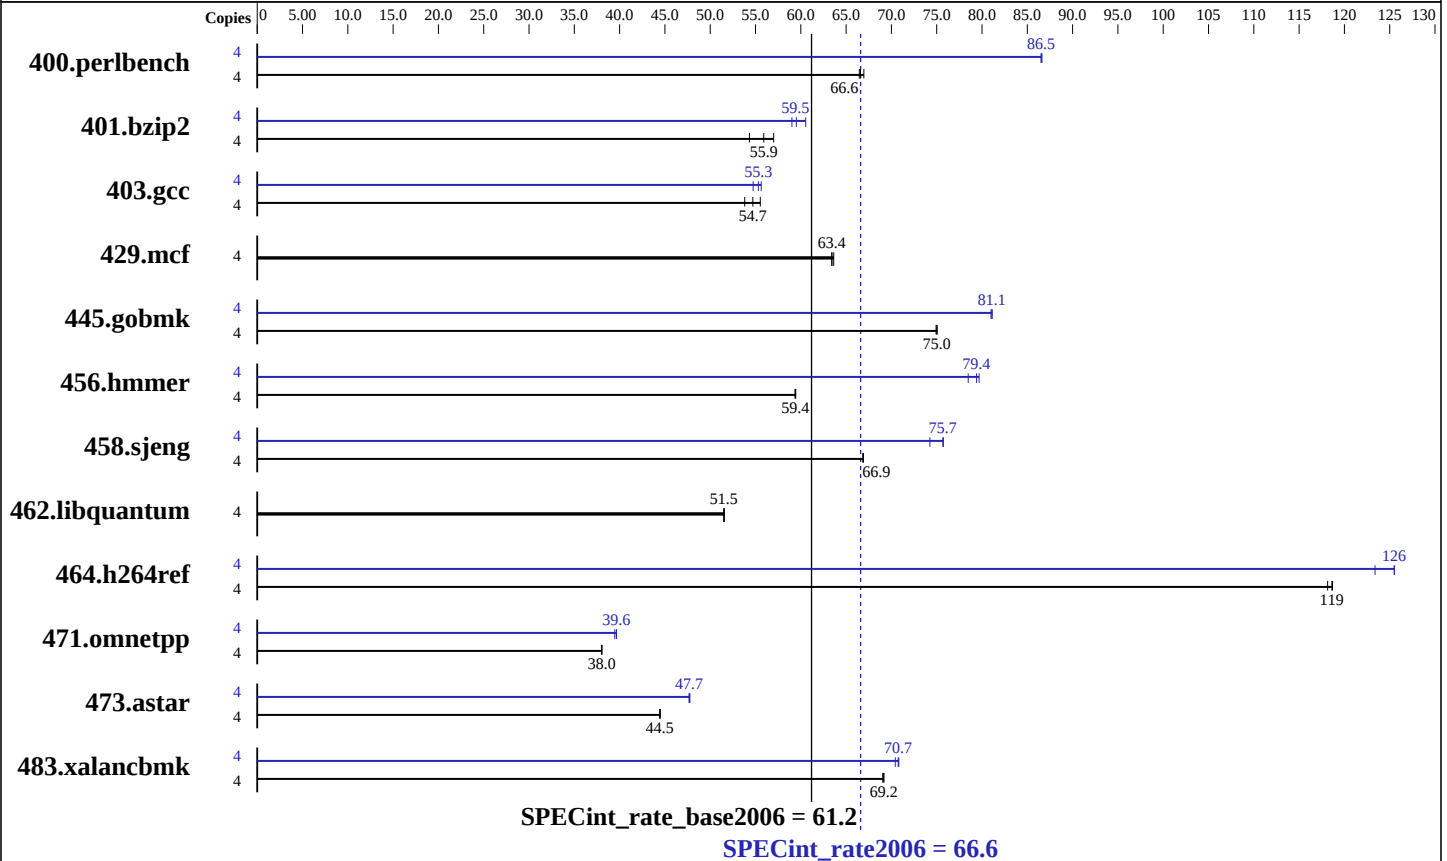

Hardware

CPU Name: Intel Core 2 Quad Q9550
CPU Characteristics: 2833
CPU MHz: Integrated
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache: None
Other Cache: None
Memory: 4 GB (4x1 GB PC2-6400 CL6 SDRAM)
Disk Subsystem: 1 x 400 GB SATA 7200 RPM
Other Hardware: None

Software

Operating System: Windows Vista64 Ultimate
Compiler: Intel C++ Compiler
for applications running on IA-32,
Version 10.1, Build 20070913
Intel C++ Compiler
for applications running on Intel 64,
Version 10.1, Build 20070913
Microsoft Visual Studio 2005 with SP1
(for libraries)
Auto Parallel: No
File System: NTFS
System State: Default
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 8.1 from
<http://www.microquill.com/>



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 66.6

CELSIUS M460, Intel Core 2 Quad Q9550

SPECint_rate_base2006 = 61.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	584	67.0	588	66.5	587	66.6	4	452	86.5	451	86.6	452	86.5
401.bzip2	4	710	54.3	677	57.0	690	55.9	4	638	60.5	654	59.0	649	59.5
403.gcc	4	598	53.8	580	55.5	589	54.7	4	582	55.3	588	54.7	579	55.6
429.mcf	4	575	63.4	575	63.4	573	63.6	4	575	63.4	575	63.4	573	63.6
445.gobmk	4	559	75.0	559	75.0	560	74.9	4	517	81.1	517	81.1	518	81.0
456.hmmer	4	629	59.4	628	59.4	628	59.4	4	470	79.4	468	79.7	476	78.5
458.sjeng	4	724	66.8	723	66.9	724	66.9	4	640	75.7	639	75.7	652	74.2
462.libquantum	4	1609	51.5	1608	51.6	1609	51.5	4	1609	51.5	1608	51.6	1609	51.5
464.h264ref	4	746	119	749	118	746	119	4	705	126	705	126	717	123
471.omnetpp	4	657	38.0	658	38.0	657	38.0	4	631	39.6	630	39.7	633	39.5
473.astar	4	632	44.4	632	44.5	631	44.5	4	588	47.8	589	47.7	589	47.7
483.xalancbmk	4	399	69.2	400	69.0	399	69.2	4	390	70.7	390	70.8	392	70.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS default settings have been used.

General Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com/>

Base Compiler Invocation

C benchmarks:
icl -Qvc8 -Qc99

C++ benchmarks:
icl -Qvc8



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 66.6

CELSIUS M460, Intel Core 2 Quad Q9550

SPECint_rate_base2006 = 61.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
483.xalancbmk: -Qoption, cpp, --no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-fast -Qvec-guard-write -F512000000

C++ benchmarks:
-fast -Qcxx_features -F512000000 shlw32M.lib -link -FORCE:MULTIPLE

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icl -Qvc8 -Qc99

401.bzip2: C:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Bin\\icl.exe
-IC:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Include
-link -LIBPATH:C:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Lib
-link -LIBPATH:"C:\\Program Files\\Microsoft Visual Studio 8\\vc\\lib"
-link -LIBPATH:"C:\\Program Files\\Microsoft Visual Studio 8\\vc\\lib\\amd64"

456.hmmer: C:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Bin\\icl.exe
-IC:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Include
-link -LIBPATH:C:\\DevelTools\\Intel\\Compiler\\C++\\10.1.011\\EM64T\\Lib
-link -LIBPATH:"C:\\Program Files\\Microsoft Visual Studio 8\\vc\\lib"
-link -LIBPATH:"C:\\Program Files\\Microsoft Visual Studio 8\\vc\\lib\\amd64"

C++ benchmarks:
icl -Qvc8



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 66.6

CELSIUS M460, Intel Core 2 Quad Q9550

SPECint_rate_base2006 = 61.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Peak Portability Flags

401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_WIN32
456.hmmr: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
483.xalancbmk: -Qoption, cpp, --no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qprefetch -F512000000 shlw32M.lib -link -FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch
-F512000000

403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F512000000

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo
-Qprec-div- -Qansi-alias -F512000000

456.hmmr: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias -Qopt-multi-version-aggressive -F512000000

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4
-F512000000

462.libquantum: basepeak = yes

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2
-Qansi-alias -F512000000

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=block -Qcxx_features -F512000000
shlw32M.lib -link -FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=routine -Qcxx_features -F512000000
shlw32M.lib -link -FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qcxx_features -F512000000 shlw32M.lib
-link -FORCE:MULTIPLE



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 66.6

CELSIUS M460, Intel Core 2 Quad Q9550

SPECint_rate_base2006 = 61.2

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Mar-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Peak Other Flags

Same as Base Other Flags

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20080124.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20080124.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Thu Apr 3 18:43:29 2008 by SPEC CPU2006 PS/PDF formatter v5614.