



SPEC® CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp®2006 = 18.5

CELSIUS V840, AMD Opteron 2354 (2.2 GHz)

SPECfp_base2006 = 16.7

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

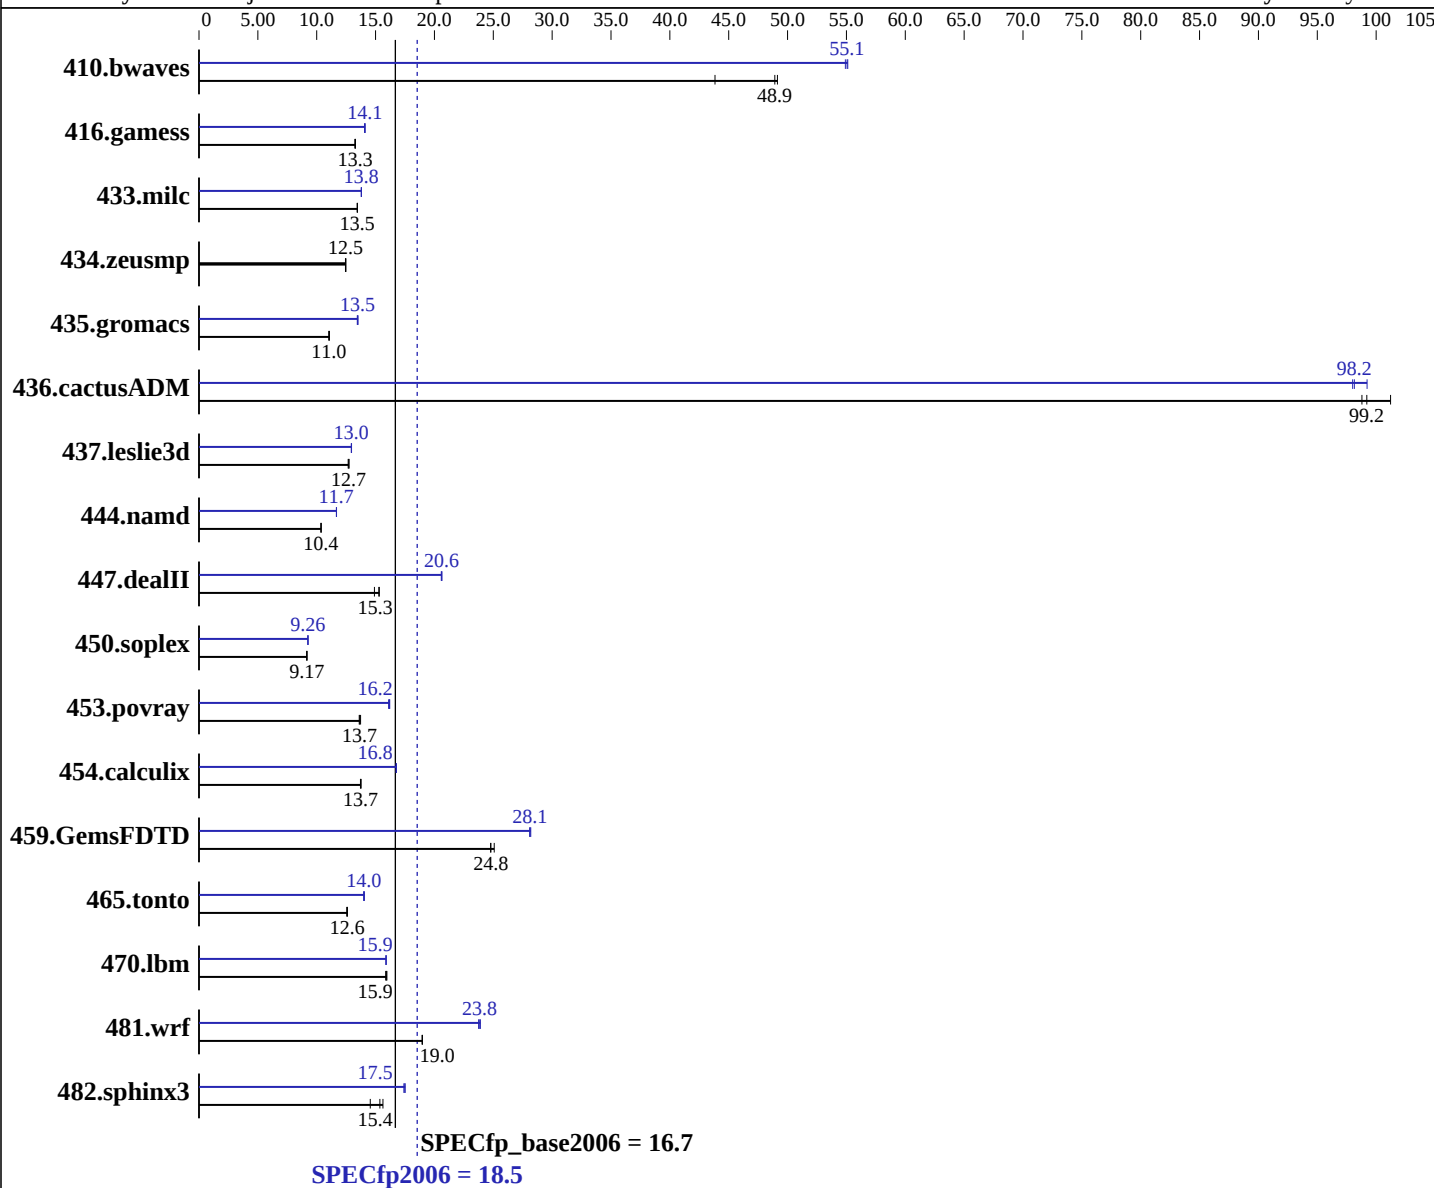

Hardware

CPU Name: AMD Opteron 2354
CPU Characteristics:
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler: PGI Workstation Complete Version 7.2-1 PathScale Compiler Suite, Release 3.2 Beta
Auto Parallel: Yes
File System: ext3
System State: Multi-User SuSE Run Level 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 18.5

CELSIUS V840, AMD Opteron 2354 (2.2 GHz)

SPECfp_base2006 = 16.7

CPU2006 license: 22

Test date: May-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

Hardware (Continued)

L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (8x2GB PC2-5300P, CL5, dual rank ECC)
 Disk Subsystem: 1 x 400 GB SATA II, 7200 rpm
 Other Hardware: None

Software (Continued)

Other Software: binutils 2.18.50

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	277	49.1	310	43.8	278	48.9	<u>247</u>	<u>55.1</u>	247	55.1	247	54.9
416.gamess	1478	13.2	1475	13.3	1473	13.3	<u>1388</u>	14.1	1388	14.1	1393	14.1
433.milc	682	13.5	683	13.4	682	13.5	<u>665</u>	13.8	665	13.8	666	13.8
434.zeusmp	730	12.5	731	12.4	730	12.5	730	12.5	731	12.4	730	12.5
435.gromacs	647	11.0	647	11.0	644	11.1	<u>531</u>	13.4	530	13.5	528	13.5
436.cactusADM	118	101	121	98.8	120	99.2	<u>122</u>	98.0	122	98.2	120	99.2
437.leslie3d	739	12.7	738	12.7	742	12.7	<u>726</u>	12.9	725	13.0	726	13.0
444.namd	773	10.4	773	10.4	774	10.4	<u>687</u>	11.7	686	11.7	687	11.7
447.dealII	749	15.3	768	14.9	747	15.3	<u>555</u>	20.6	556	20.6	554	20.6
450.soplex	911	9.15	910	9.17	910	9.17	<u>901</u>	9.26	901	9.26	902	9.25
453.povray	391	13.6	388	13.7	390	13.7	<u>330</u>	16.1	328	16.2	329	16.2
454.calculix	599	13.8	600	13.7	601	13.7	<u>492</u>	16.8	492	16.8	492	16.8
459.GemsFDTD	428	24.8	423	25.1	428	24.8	<u>378</u>	28.1	377	28.1	376	28.2
465.tonto	782	12.6	784	12.6	780	12.6	<u>703</u>	14.0	700	14.1	703	14.0
470.lbm	863	15.9	861	16.0	866	15.9	<u>864</u>	15.9	865	15.9	865	15.9
481.wrf	589	19.0	588	19.0	589	19.0	<u>470</u>	23.8	467	23.9	468	23.8
482.sphinx3	1247	15.6	1340	14.6	1268	15.4	<u>1113</u>	17.5	<u>1120</u>	17.4	1115	17.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

powersave -f is applied to set CPU to maximum frequency prior to run
 stacksize is set to unlimited prior to run
 ulimit -l 2457600
 PGI_HUGE_PAGES set to 150
 (Total number of huge pages available is 1200)

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 18.5

CELSIUS V840, AMD Opteron 2354 (2.2 GHz)

SPECfp_base2006 = 16.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge:896 -Mconcur -Mfprelaxed -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur --zc_eh
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Mfprelaxed -Msmartalloc=huge:896 -Mconcur -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 18.5

CELSIUS V840, AMD Opteron 2354 (2.2 GHz)

SPECfp_base2006 = 16.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge:896 -Mconcur -Mfprelaxed -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

470.lbm: pathcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pgf95

459.GemsFDTD: pathf95

Benchmarks using both Fortran and C:

pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 = 18.5

CELSIUS V840, AMD Opteron 2354 (2.2 GHz)

SPECfp_base2006 = 16.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Optimization Flags

C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:896 -Msafeptr -Mconcur
-Mfpelaxed -Mipa=jobs:4 -Mipa=inline -Mipa=arg
-Mipa=const -Mipa=ptr -Mipa=shape -tp barcelona-64
-Bstatic_pgi

470.lbm: -march=barcelona -Ofast -CG:sse_cse_regs=0
-CG:locs_shallow_depth=1 -m3dnow -apo

482.sphinx3: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfpelaxed -Msmartalloc -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge:896 -Mnodepch
-Mfpelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32 -apo

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -TENV:frame_pointer=off
-LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0 -m32 -apo

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-Mconcur -Mloop32 -Mpre -Mfpelaxed -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

416.gamess: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=noaltcode -Mprefetch=t0 -Mfpelaxed -tp barcelona-64
-Bstatic_pgi

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mconcur=noaltcode(pass 2) -Mipa=jobs:4(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge:896 -Mprefetch=distance:8
-Mprefetch=t0 -Mfpelaxed -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2008 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp2006 =

18.5

CELSIUS V840, AMD Opteron 2354 (2.2 GHz)

SPECfp_base2006 =

16.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Optimization Flags (Continued)

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -apo

465.tonto: -fastsse -O4 -Mvect=noaltcode -Msmartalloc=huge:896
-Mprefetch=distance:8 -Mprefetch=t0 -Mfprelaxed
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64
-Bstatic_pgi

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur
-Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -fastsse -Msmartalloc=huge:896 -Mfprelaxed -Mconcur -Mdse
-Mipa=jobs:4 -Mipa=fast -Mipa=inline -tp barcelona-64
-Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=jobs:4(pass 2) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-fastsse -Msmartalloc=huge:896 -Mloop32 -Mprefetch=t0
-Mpre -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc
-Mprefetch=distance:8 -Mconcur=noaltcode -Mfprelaxed
-tp barcelona-64 -Bstatic_pgi

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/fsc-mix-pgi-path.20080709.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/fsc-mix-pgi-path.20080709.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 8 20:26:07 2008 by SPEC CPU2006 PS/PDF formatter v6197.