



SPEC® CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®2006 = 16.8

CELSIUS R550, Intel Xeon E5205, 1.87 GHz

SPECint_base2006 = 14.1

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

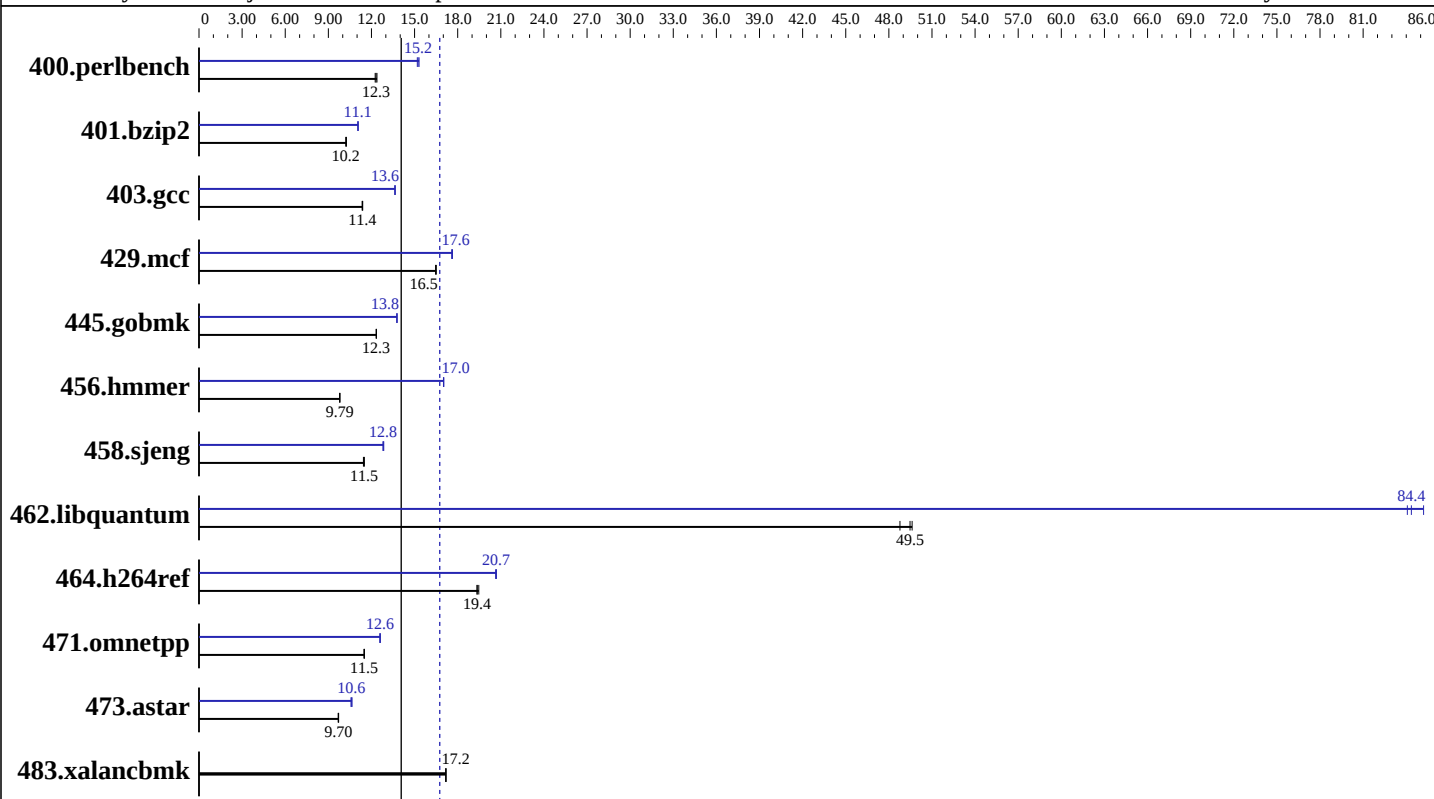

SPECint_base2006 = 14.1

SPECint2006 = 16.8

Hardware

CPU Name: Intel Xeon E5205
CPU Characteristics: 1067 MHz system bus
CPU MHz: 1867
FPU: Integrated
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 6 MB I+D on chip per chip
L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1 x SATA II, 400 GB, 7200 rpm
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler: Intel C++ Compiler for Linux32 and Linux64, Version 10.1, Build 20070913
Auto Parallel: Yes
File System: ext3
System State: Multi-User Run Level 3
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap Library, Version 8.1
binutils-2.17.50.0.5-0.1.x86_64



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 16.8

CELSIUS R550, Intel Xeon E5205, 1.87 GHz

SPECint_base2006 = 14.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	797	12.3	789	12.4	<u>793</u>	<u>12.3</u>	643	15.2	638	15.3	<u>641</u>	<u>15.2</u>
401.bzip2	<u>944</u>	<u>10.2</u>	944	10.2	941	10.3	873	11.1	871	11.1	<u>873</u>	<u>11.1</u>
403.gcc	<u>708</u>	<u>11.4</u>	709	11.4	707	11.4	590	13.6	<u>590</u>	<u>13.6</u>	591	13.6
429.mcf	<u>553</u>	<u>16.5</u>	553	16.5	554	16.5	518	17.6	<u>518</u>	<u>17.6</u>	517	17.6
445.gobmk	<u>850</u>	<u>12.3</u>	850	12.3	850	12.3	<u>762</u>	<u>13.8</u>	762	13.8	762	13.8
456.hmmer	<u>953</u>	<u>9.79</u>	952	9.80	953	9.79	<u>548</u>	<u>17.0</u>	548	17.0	548	17.0
458.sjeng	1052	11.5	<u>1053</u>	<u>11.5</u>	1058	11.4	941	12.9	945	12.8	<u>944</u>	<u>12.8</u>
462.libquantum	425	48.8	<u>419</u>	<u>49.5</u>	418	49.6	243	85.2	246	84.1	<u>246</u>	<u>84.4</u>
464.h264ref	<u>1143</u>	<u>19.4</u>	1144	19.3	1137	19.5	1072	20.6	1070	20.7	<u>1070</u>	<u>20.7</u>
471.omnetpp	543	11.5	544	11.5	<u>543</u>	<u>11.5</u>	497	12.6	495	12.6	<u>496</u>	<u>12.6</u>
473.astar	725	9.69	<u>724</u>	<u>9.70</u>	723	9.72	<u>661</u>	<u>10.6</u>	664	10.6	659	10.6
483.xalancbmk	401	17.2	402	17.2	<u>402</u>	<u>17.2</u>	401	17.2	402	17.2	<u>402</u>	<u>17.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)

Platform Notes

BIOS configuration:
Enhanced Speedstep Technology = Disable
Hardware Prefetch = Enable, Adjacent Sector Prefetch = Enable
SnoopFilter = Disable

General Notes

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmer in peak were built with 64-bit Intel
compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

Continued on next page

Standard Performance Evaluation Corporation
info@spec.org
<http://www.spec.org/>



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 16.8

CELSIUS R550, Intel Xeon E5205, 1.87 GHz

SPECint_base2006 = 14.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -w1, -z, muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 16.8

CELSIUS R550, Intel Xeon E5205, 1.87 GHz

SPECint_base2006 = 14.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LITTLE_ENDIAN
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32
403.gcc: -fast -inline-calloc -opt-malloc-options=3
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
-auto-ilp32
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright ©2007 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint2006 = 16.8

CELSIUS R550, Intel Xeon E5205, 1.87 GHz

SPECint_base2006 = 14.1

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Other Flags

Same as Base Other Flags

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20080124.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20080124.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Feb 19 19:13:32 2008 by SPEC CPU2006 PS/PDF formatter v5614.